



TYPICAL VALVES FEATURE AT VARIOUS OF CONTROL CURRENT



Type U (7–105 bar)

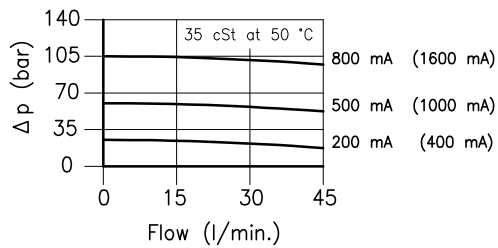

Type D (10–210 bar)

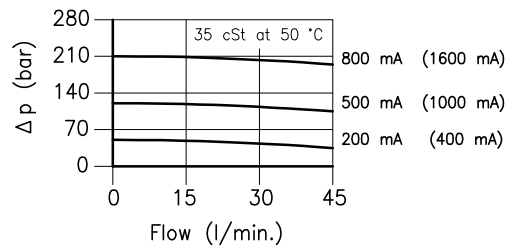


Type T (14–315 bar)

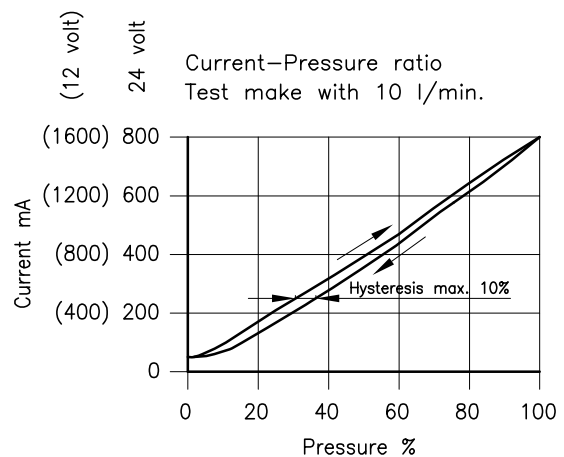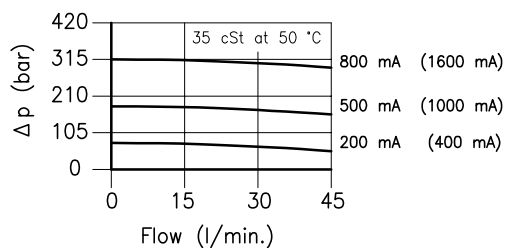

Ordering informations

PLY 30/D-24C-22H-W

PLY 30 = Valve type



Setting range

U = 7 – 105 bar

D = 10 – 210 bar

T = 14 – 315 bar

Voltage and power

12C-22H = 12 Volt DC

24C-22H = 24 Volt DC

W = Optional without Emergency

Codes:

PLY 30/U-12C-22H	35 011 173
PLY 30/D-12C-22H	35 011 174
PLY 30/T-12C-22H	35 011 175

PLY 30/U-24C-22H	35 011 188
PLY 30/D-24C-22H	35 011 189
PLY 30/T-24C-22H	35 011 190

External seals kit	90 620 104
--------------------	------------

Code only coil:

Coil P50-24C-22H	55 125 114
Coil P50-12C-22H	55 125 113

PLY 30 valves can be assembled on standard bodies 30-C3 series; for dimensions see catalogue 16.010